



Description

A 6 figure, general purpose heavy duty industrial stroke counter designed for high count rates and continuous operation even under the most adverse operating conditions. Corrosion resistant material and finishes. Large, easy-to-read numbers.

Features

- Heavy duty
- High count rates
- Corrosion resistant

Options

- Non-reset
- Double shaft extensions
- Special mounting bases
- Weatherized versions
- 1022-006S - additional spring
- 1255-004S - additional lever

Specifications

Figures: 6 figures, white on black, 0.30" [7.6mm] high
Reset: Knob or lock and key
Speed: 1,000 counts/minute
Rotation: Top-coming or top-going
Count Stroke: 40° Min. - 70° Max.



Shaft Extension: Right-hand or left-hand
Shaft Diameter: 0.25" [6.4mm]
Operating Life: Beyond 100 million counts
Temp. Range: -15°F to +140°F [-26°C to +60°C]
Weight: 18 oz. [510g]

Models	Description	Models	Description
1-2916	Left-hand, top-coming, standard reset knob	1-2946	Right-hand, top-going, standard reset knob
1-2926	Left-hand, top-going, standard reset knob	2-2936	Right-hand, top-coming, lock and key reset
1-2936	Right-hand, top-coming, standard reset knob	V1-2936	Right-hand, top-coming, standard reset knob, V-base


* Items in bold are normally in factory stock.

Dimensions

Right - Hand Shaft

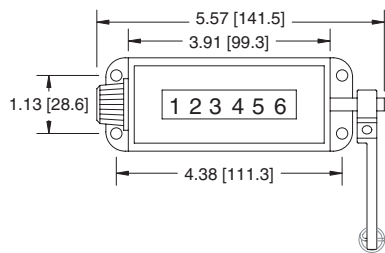


V - Mount

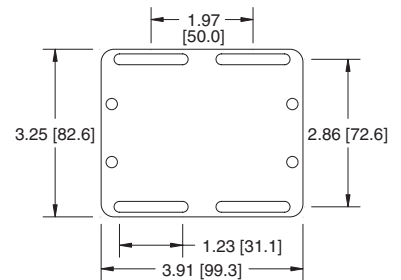


Mounting holes: 0.22" [5.6mm] Dia.

Applications

Punch presses



Shears



Cement trucks





Description

A 6 figure, general purpose, industrial rotary counter designed for use on equipment where environmental conditions are far from ideal. Various count ratios make it suitable for winding equipment, measuring devices and direct reading instruments.

Features

- Heavy duty
- High count rates
- Corrosion resistant

Options

- Non-reset
- Subtractive
- Double shaft extensions
- Special mounting bases
- Weatherized versions
- 98WF - Measuring Wheel - 12" circumference


Specifications

Figures:	6 figures, white on black, 0.30" [7.6mm] high	Shaft Extension:	Right-hand or left-hand
Reset:	Knob or lock and key	Shaft Diameter:	0.25" [6.4mm]
Speed:	2,500 counts/minute or revolutions/minute, whichever is lower	Ratio:	1 count/revolution or 10 counts/revolution
Rotation:	Top-coming or top-going, to add. Will not subtract if rotation is reversed	Operating Life:	Beyond 100 million counts
		Temp. Range:	-15°F to +140°F [-26°C to +60°C]
		Weight:	18 oz. [510g]

Models	Description	Models	Description
11-2916	Left-hand, top-coming, 10 counts/revolution	21-2936	Right-hand, top-coming, 1 count/revolution
11-2936	Right-hand, top-coming, 10 counts/revolution	21-2946	Right-hand, top-going, 1 count/revolution
21-2916	Left-hand, top-coming, 1 count/revolution	22-2936	Right-hand, top-coming, 1 count/revolution, lock & key reset,
21-2926	Left-hand, top-going, 1 count/revolution		

Dimensions


Right - Hand Shaft

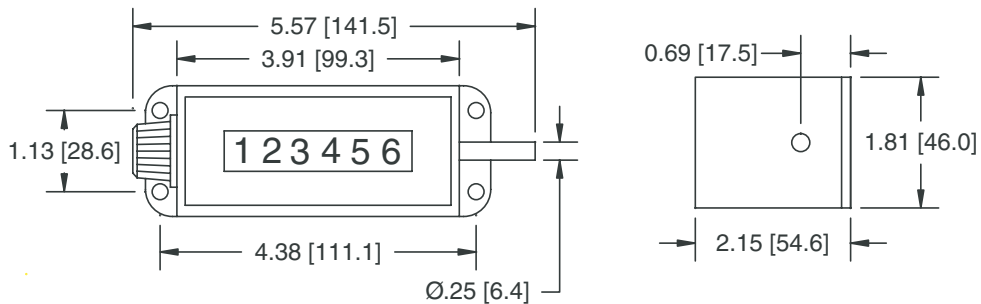

Mounting holes: 0.22" [5.6mm] Dia.

Applications

Winding equipment



Spooling



Positioning

